

HIGH DENSITY VGA USB KVM SWITCH

Control up to 32 USB computers with one USB keyboard, USB mouse & VGA monitor



UNIMUX-USBV-16HDU (Front and Back)

Available Options:

- **USB connector for touchscreen, SMART Board™ Interactive Whiteboards, CAC reader, or other device.**
- **Extender port for connecting a remote user 300 feet away via CAT5.**

Features & Applications

The UNIMUX™ High Density USB KVM Switch allows a user to control up to 32 USB computers with one USB keyboard, USB mouse and VGA monitor. Dedicated internal microprocessors emulate keyboard and mouse presence to each attached CPU 100% of the time so all computers boot error-free.

- The High Density Switch saves rack space
 - 4-, 8- and 16-port switches are 1RU in height.
 - 32-port switch is 2RU in height.
 - Rackmount kit included.
- Features NTI's patented true autoboot USB switching – all attached computers can be booted simultaneously.
- Compatible with USB computers (PC, SUN and MAC).
- Crisp and clear 1920x1200 video resolution.
- Fully compliant with USB 1.1 standards.
- High quality construction.
- Cascade UNIMUX switches off a single master switch to control up to 1,024 computers as if from one switch.
- Flash upgradeable.
- Cabling runs are simplified with NTI's high density KVM switch cables.
- Optional support for a USB 1.1 device, in addition to keyboard and mouse, such as a USB touch screen monitor, SMART Board™ Interactive Whiteboards, or CAC card reader.
- Optional extender port for locating a remote user up to 300 feet via CAT5/5e/6 cable.
 - Only one user can be active at a time.
 - Locked out user must wait five seconds after last keystroke or mouse movement from active user.
 - For switches with the additional USB port option, the remote user does not have access to the extra USB device.

Specifications

Hosts

- Female 15-pin HD connectors.
- Supports USB computers with VGA video.
- Multiplatform support: Windows 2000/XP/Vista/Server 2000/2003/2008, Solaris, Linux, FreeBSD, and MAC OS 9/10.
- Any legacy PS/2 or SUN computer can be connected by using a USB-PS2-R or USB-SUN-R.

Monitor

- Crisp and clear 1920x1200 resolution.
- One female 15-pin HD connector.
- A multiscan VGA monitor is required to display the different video outputs from different platforms.
- Bandwidth is 150 MHz.

Devices

- Two female USB Type A connectors.
- Compatible with most USB keyboards and mice, including Microsoft USB Intellimouse®
- Keyboard and mouse are hot-pluggable.
- Available with an optional female USB Type A connector for an additional USB 1.1 device.
 - Use to connect a USB touch screen monitor, CAC card reader, or other USB devices.

Regulatory Approvals

- CE, RoHS

Power

- 110 or 220 VAC at 50 or 60 Hz via IEC connector.
- Available power cord lengths: 1/1.5/3/6 feet


Environmental

- Operating temperature: 32°F to 100°F (0°C to 38°C)
- Storage temperature: -20°F to 140°F (-30°C to 60°C)
- Operating and Storage Relative Humidity: 17 to 90% non-condensing RH.

Warranty

- Two years.

Configuration and Cable Illustration

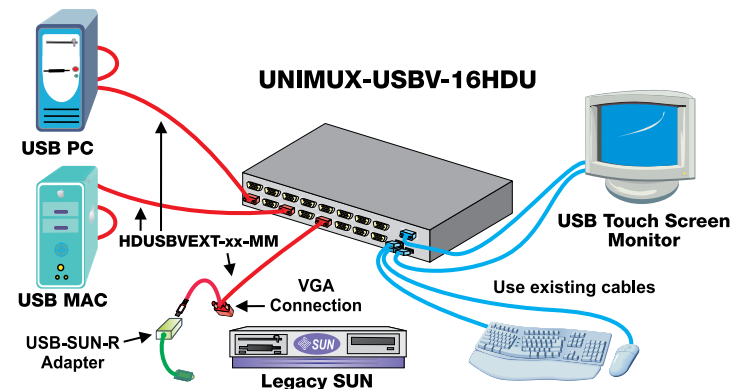

HIGH DENSITY VGA USB KVM SWITCH

Control up to 32 USB computers with one USB keyboard, USB mouse & VGA monitor

Built-In Control Methods

Keyboard

- **Scan, Broadcast** or **Command Modes** are available from the keyboard.
- Use the keyboard to command the switch box to select ports or configure the **SCAN** delay.

Front Panel Interface

- Touch a button and be connected to a computer, or change modes of operation.
- LEDs indicate currently selected port and mode of operation.

RS232 Control

- Female RJ45 connector.
- Baud rate 1200 to 115200.
- Address up to 15 units, all of which can be daisy-chained and controlled by one serial port.

Commands

- RS – causes switch to reset.
- CS – connects output with specific input.
- RO – reads what input is connected to output.
- RU – reads size of switch.

On Screen Display (OSD)

- Select computers by name with the On Screen Display (OSD).
- Use keyboard or mouse to operate the switch from menus superimposed onto the monitor.
- Shows names of computers on cascaded switches up to 1024 ports.
- Names can be up to 12 characters long.
- Power status of each computer is displayed.
- View usage statistics – power-on cycles and hours of usage.
- Help screens assist users with the OSD.
- Modify the size and position of the OSD.
- OSD is built into the switch – no need to install additional hardware or software.
- OS and software-independent.

Security

- Advanced security included.
- Each user password can be up to 15 characters long, and each switch can store up to 63 users.
- Administrator can enable or disable all security features and select which computers each user can access.
- Once security is enabled, a user or administrator must login in order to access any of the computers connected to the switch.

Ordering Specifications

This example explains the NTI part by breaking it down into the available options. When ordering, choose the options that you require.

UNIMUX - ^{Universal Serial Bus Version} **USBV** - ^{Number of Ports} **x** ^{High Density} **HD** ^{Optional USB Port} **U** ^{Optional Extender Port} **C5**

High Density VGA USB KVM Switch Models

NTI Part #	# of CPUs (x)	Desktop Size WxDxH (in)	Rack Units	Rack Size WxDxH (in)
UNIMUX-USBV-4HD	4	16.7x6.8x1.75 (without supplied rackmount kit)	1RU	19x6.8x1.75 (with supplied rackmount kit)
UNIMUX-USBV-8HD	8	16.7x6.8x1.75 (without supplied rackmount kit)	1RU	19x6.8x1.75 (with supplied rackmount kit)
UNIMUX-USBV-16HD	16	16.7x6.8x1.75 (without supplied rackmount kit)	1RU	19x6.8x1.75 (with supplied rackmount kit)
UNIMUX-USBV-32HD	32	N/A	2RU	19x10x3.5

Cables

- Interface cables between your computers and the switch are required for proper operation. Use HDUSBVEXT-xx-MM to connect computers to switch.
- Cables not included.

USB KVM Receiver (Remote Unit) For use with switch with extender port option

NTI Part #	Maximum Extension (ft.)	Dimensions WxDxH (in.)
ST-C5USBV-R-300	300	3.5x3.1x1.3



330.562.1999
Worldwide fax



sales@ntigo.com



www.networktechinc.com

© 2007, 2009 NTI
All rights reserved